
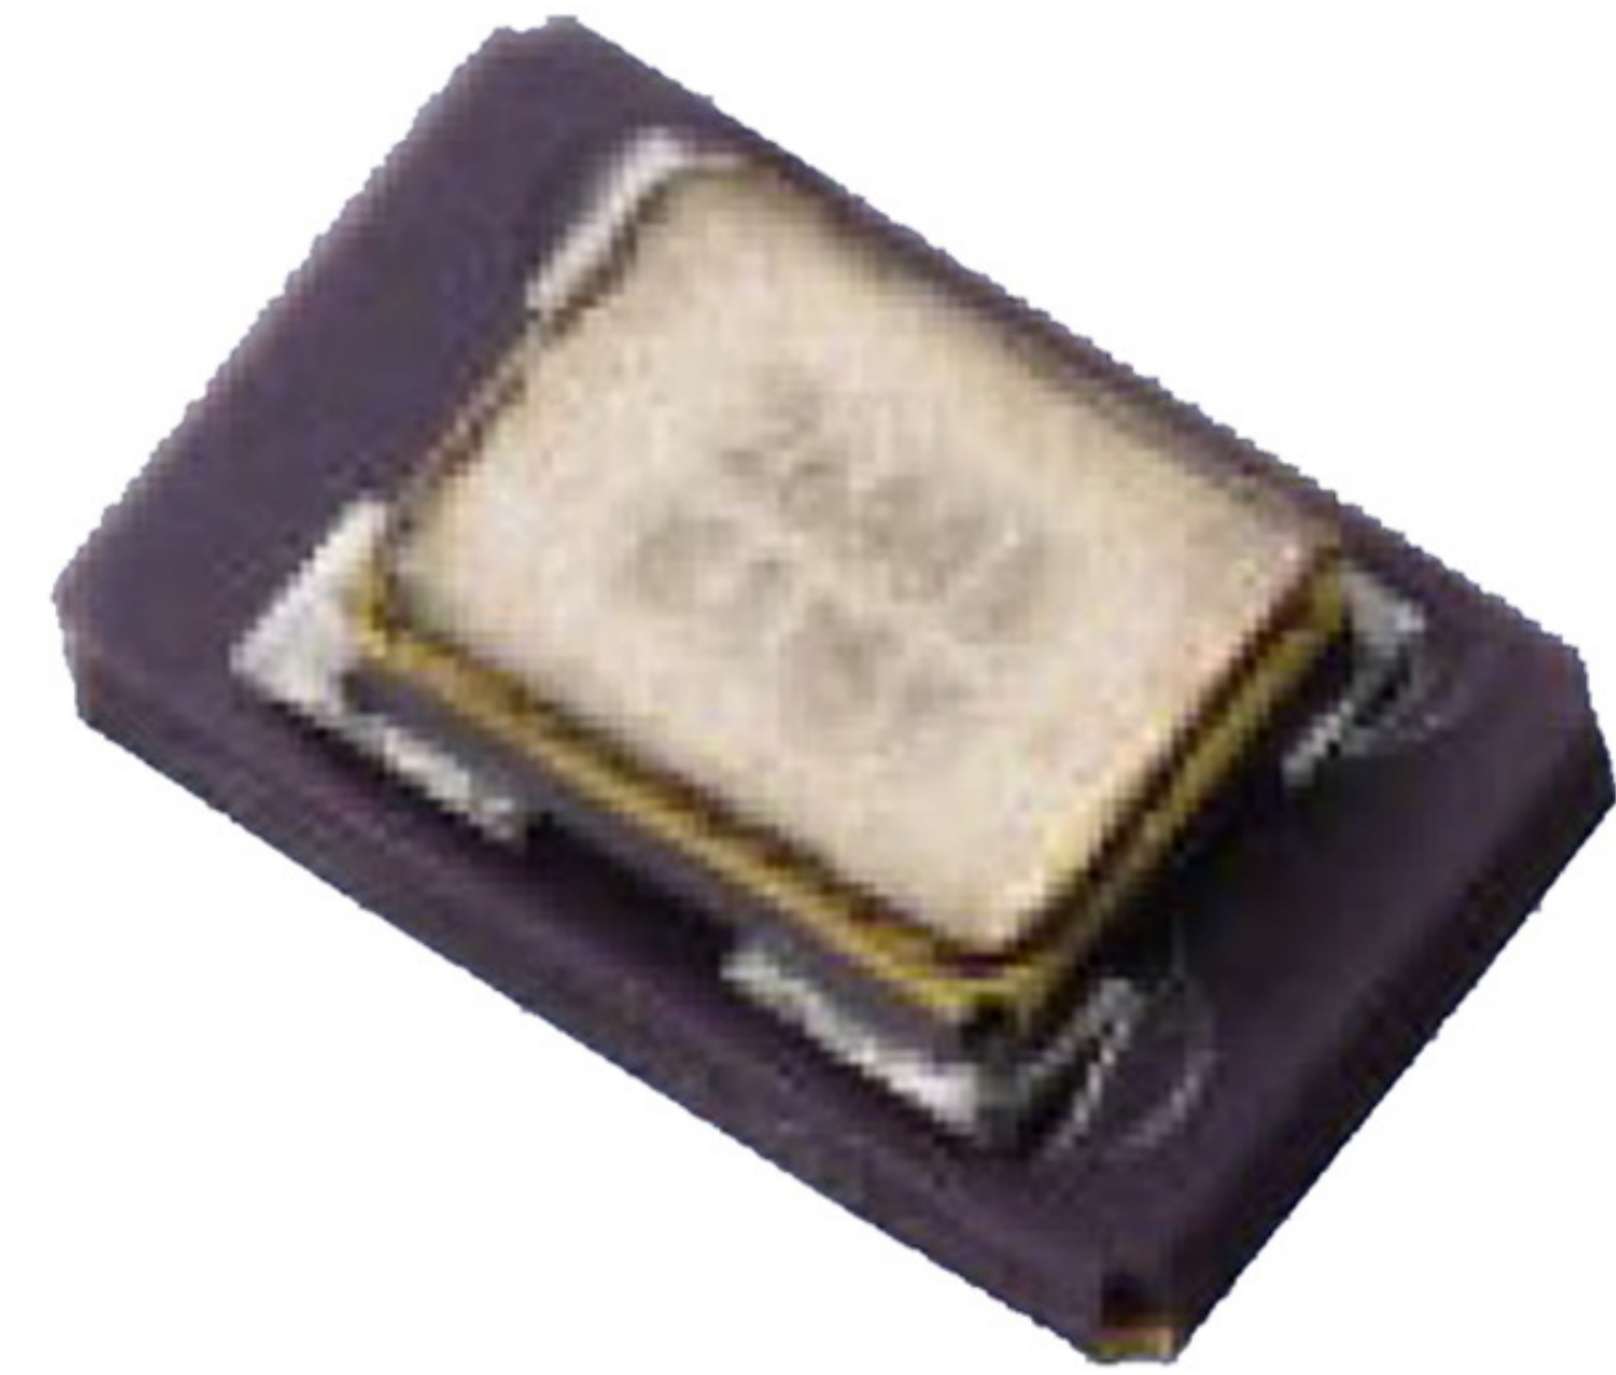


◆ Mechanical Dimensions 外型尺寸

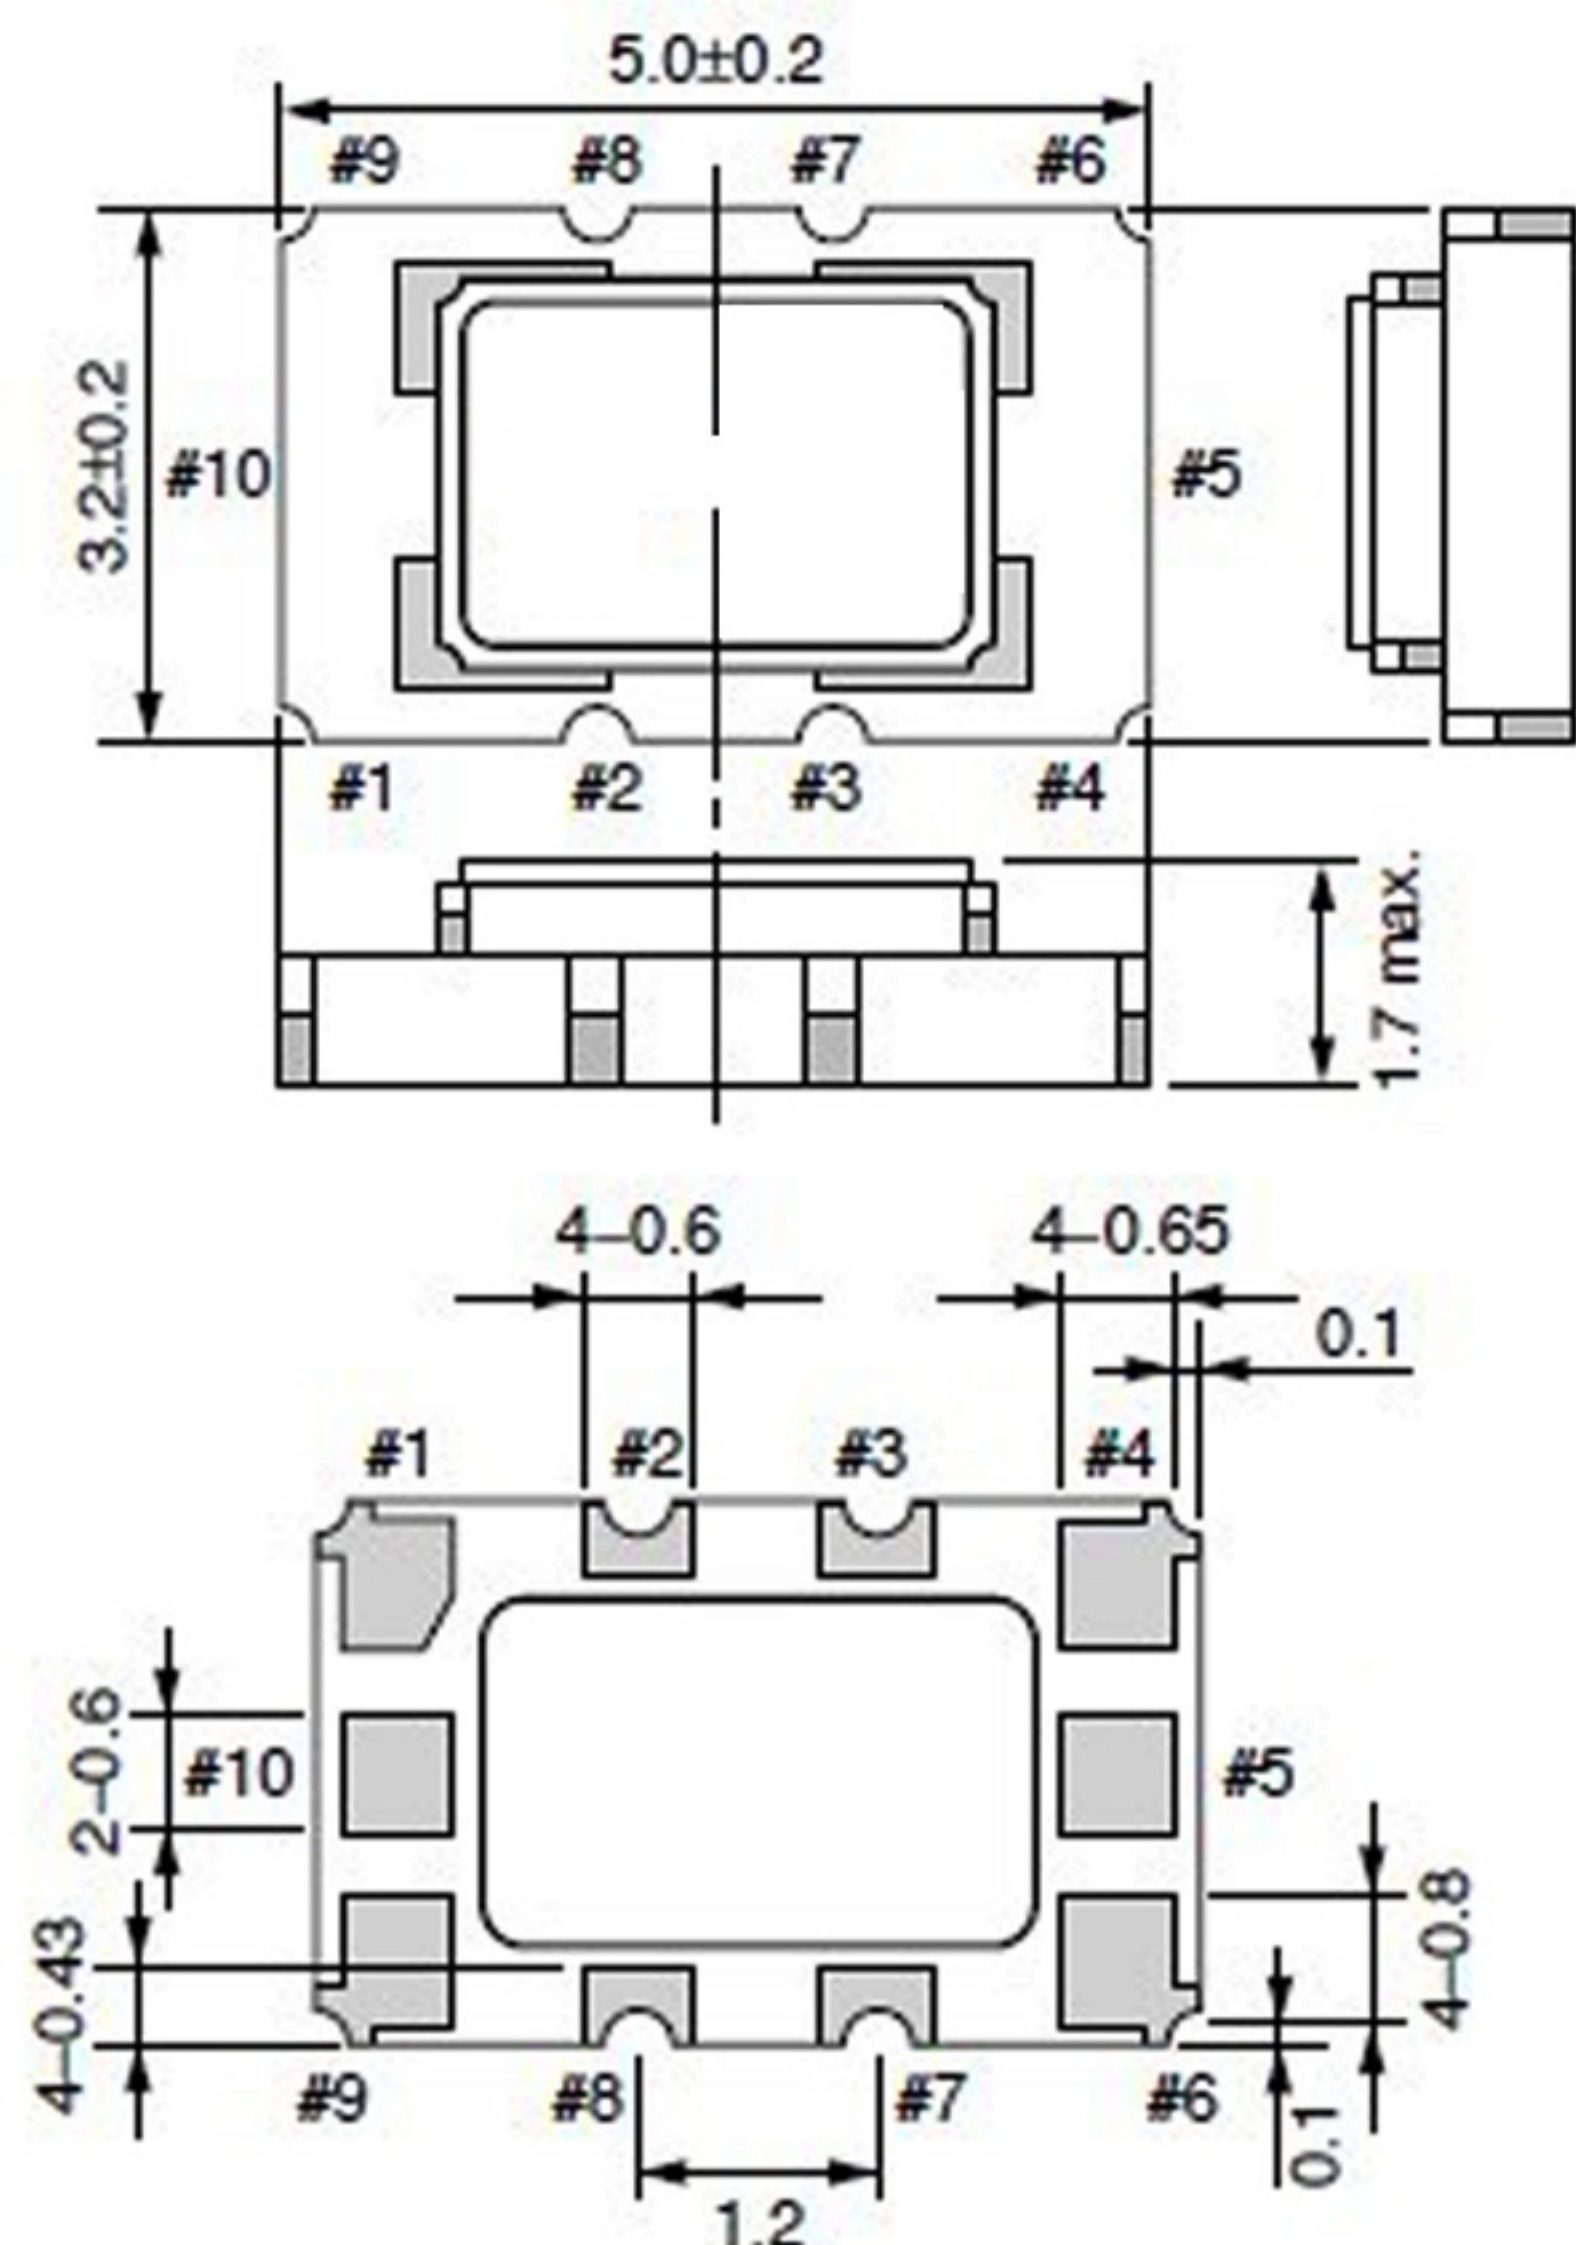

◆ Electrical Specifications 电气参数

型号	Holder Type	5x3.2 SMD TCXO
频率范围	Frequency Range	13.000MHz、19.200MHz、19.680MHz、26.000MHz
典型频点	Typcial Frequency	16.3676MHz/16.36766MHz/16.367677MHz/16.368MHz/16.369MHz/24.5535MHz/26MHz
输入电压	Supply Voltage(VCC)	5.0VDC or 3.3VDC±10%
工作温度范围	Operating Temperture Range	-10°C - +60°C to -40°C - +85°C
储存温度范围	Storage Temperture Range	-55°C - +125°C
负载	Load	(10K//10PF)±10%
频率偏差	Frequency Tolerance	2.0ppm Max.
频率稳定度	Frequency Stability	±2.5ppm
老化	Aging	±1ppm Max./year
消耗电流	Current Consumption	20mA Max.
相位噪声	Phase Noise	
	100Hz offset typical	-115dB/Hz
	1KHz offset typical	-135dB/Hz
	10KHz offset typcial	-148dB/Hz

◆ Typcial Frequency 典型频点

12.8MHz、13.56MHz、19.2MHz、19.44MHz、
20MHz、26MHz、16.3676MHz、16.36766MHz、
16.367677MHz、16.368MHz、16.369MHz、
24.5535MHz、26MHz

◆ Reflow Condition(回流焊条件)

